


Zone	Max. Amps	Power	Thermocouple
1	10	A5 & A10	*G1 & G2
2	10	A4 & A9	*G3 & G4
3	10	A3 & A8	*G5 & G6
4	10	A2 & A7	*G7 & G8
5	10	A1 & A6	*G9 & G10
6	10	B5 & B10	*G11 & G12
7	10	B4 & B9	*G13 & G14
8	10	B3 & B8	*G15 & G16
9	10	B2 & B7	*G17 & G18
10	10	B1 & B6	*G19 & G20
11	10	C5 & C10	*F1 & F2
12	10	C4 & C9	*F3 & F4
13	10	C3 & C8	*F5 & F6
14	10	C2 & C7	*F7 & F8
15	10	C1 & C6	*F9 & F10
16	20	D1 & D2	*F11 & F12
17	20	D3 & D4	*F13 & F14
18	20	E1 & E2	*F15 & F16
19	20	E3 & E4	*F17 & F18
20	20	E5 & D5	*F19 & F20

* Positive (+) Thermocouple Lead

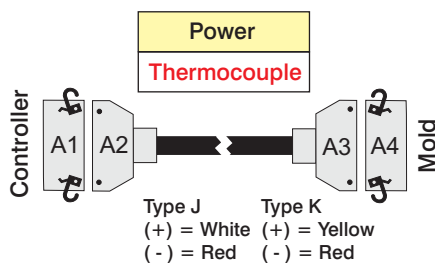

Item	Part Number(s)			
	Base	Hood	Insert	Strain Relief
A1	6124-040		N/A	
A2		6124-164	N/A	6124-068
A3		6124-164	N/A	6124-068
A4	6124-040		N/A	
Power & T/C Cable	WAE80E80C?F??			

DWG 20

Date: 8.24.2004
Enclosure: CT-0120 - Dual Latch
Tool End: CT-0120 - Dual Latch

Gammalux

Sterling, VA USA Tel. +1-(703) 471-5050
Wiesbaden, Germany Tel. +49-(0)-611-973430
Ube, Japan Tel. +81-(836) 54-4369
www.gammalux.com; www.gammalux.de