

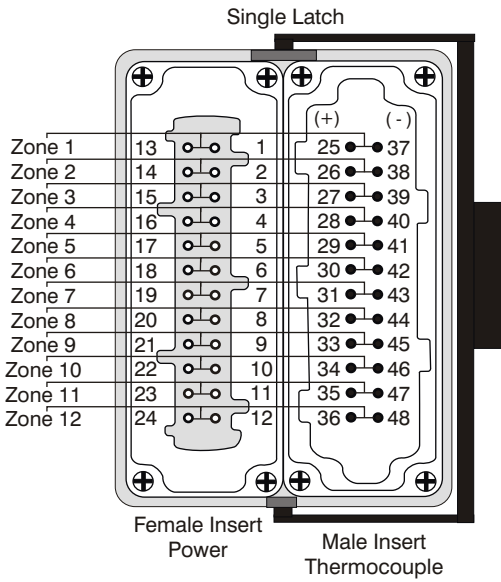


A1


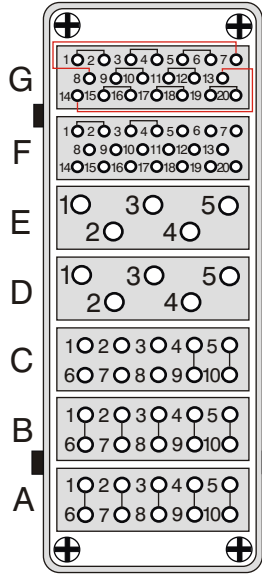


A3




Female Insert Dual Latch

A4

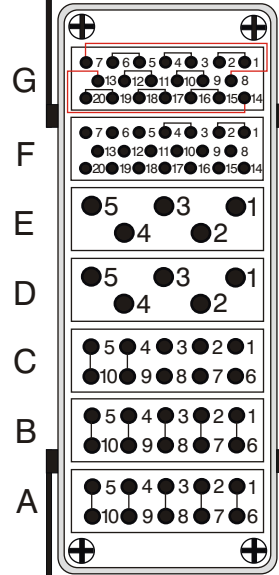

Male Insert Dual Latch


A2

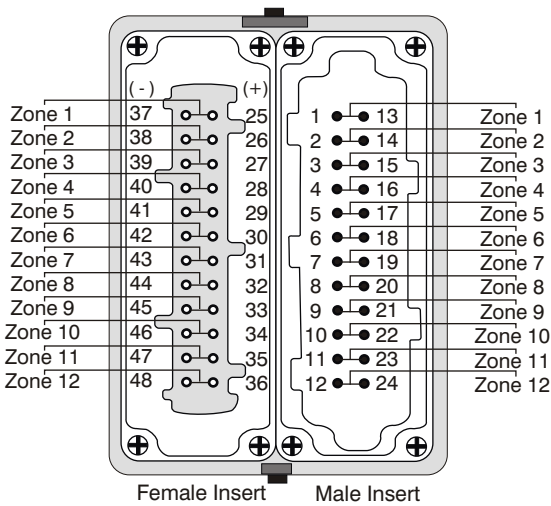

Single Latch

Zone	Max. Amps	Power	Thermocouple
1	10	A5 & A10	*G1 & G2
2	10	A4 & A9	*G3 & G4
3	10	A3 & A8	*G5 & G6
4	10	A2 & A7	*G7 & G8
5	10	A1 & A6	*G9 & G10
6	10	B5 & B10	*G11 & G12
7	10	B4 & B9	*G13 & G14
8	10	B3 & B8	*G15 & G16
9	10	B2 & B7	*G17 & G18
10	10	B1 & B6	*G19 & G20
11	10	C5 & C10	*F1 & F2
12	10	C4 & C9	*F3 & F4

* Positive (+) Thermocouple Lead

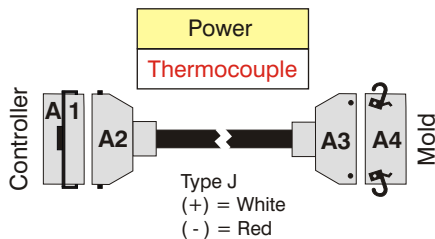

Part Number(s)

Item	Base	Hood	Insert	Strain Relief
A1	6124-018		6124-008/011	
A2		6124-079	6124-007/012	6124-080
A3		N/A	N/A	6124-080
A4	N/A		N/A	
Power & T/C Cable	WAE48E80DC?F??			

DWG 66

Date: 8.24.2004
Enclosure: HBE48 - Single Latch
Tool End: CT-0120 - Dual Latch

Gammflux
Sterling, VA USA Tel. +1-(703) 471-5050
Wiesbaden, Germany Tel. +49-(0)-611-973430
Ube, Japan Tel. +81-(836) 54-4369
www.gammflux.com; www.gammflux.de